#### A high-performance modular radiant board system



### Thoughtfully designed for today's construction -featuring maximum comfort and value




Our thermodynamically appropriate aluminum layer + easy-to-arrange boards + easy tubing installation = optimum performance, flexibility, affordability and ease. A win-win for both installers and owners.


The only available FSC-certified radiant board product, using aluminum with recycled content on USA 6-7-ply plywood. Glue no-VOC when cured.

EASY TO INSTALL Visit our website for a free quote, easy online ordering and our Installation Manual. We ship factory direct to job sites.



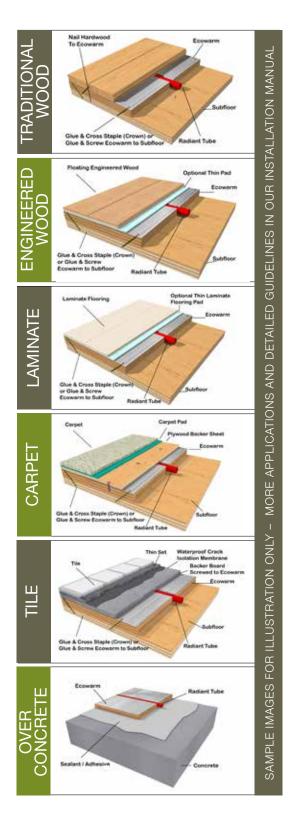

#### VERSATILE MODULAR BOARD SYSTEM

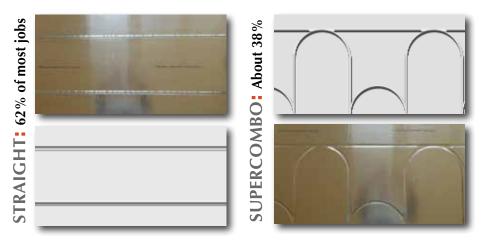

**Ecowarm Radiant Board**<sup>™</sup> is manufactured from FSC® certified plywood from sustainably managed forests. Its heavy recycled aluminum layer is bonded with a water-based VOC adhesive. Cut from standard 4′ x 8′ plywood sheets, both straight and supercombo finished board measurement is 47″ x 23.5″. Tubing (1/2″ PEX) is spaced 11.750″ on center. One-quarter radius turns measure 5.935″ from the edge.

## PRODUCT INFORMATION

**BOARD WEIGHT:** Approximately 2.3 lbs per square foot, 18 lbs per board **PALLET SIZE:** 4'x4'x32" tall (2 boards per row, 37 rows high, 74 board total) **PALLET WEIGHT:** Approximately 1370 lbs. (smaller pallets by special order) **PALLET APPEARANCE:** Shrink wrapped, corner protected, part #s color coded **TRUCKLOAD QUANTITY:** Approximately 20,007 square feet

**RECOMMENDED MIX:** Straight 62%, Supercombo 38%, +5-10% extra/waste

# QUESTIONS / QUOTES / DESIGN

CALL US TOLL FREE VISIT US ONLINE

866-341-1854

NLINE www.ecowarmradiantheat.com